FPM-3171G

17" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports

User Manual

Copyright
This document is copyrighted by Advantech Co., Ltd. 2005. All rights are reserved. Advantech Co., Ltd. reserves the right to make improvements to the products described in this manual at any time. Specifications are thus subject to change without notice.
No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of Advantech Co., Ltd. Information provided in this manual is intended to be accurate and reliable. However, Advantech Co., Ltd., assumes no responsibility for its use, nor for any infringements upon the rights of third parties which may result from its use.

All brand and product names mentioned herein are trademarks or registered trademarks of their respective holders.

This Manual Covers the Following Models:

FPM-3171G-XCE 17" SXGA Industrial Monitor

FPM-3171G-RCE 17" SXGA Industrial Monitor with Resistive Touchscreen (RS232&USB)

Part No. 2003317103 3rd Edition
Printed in Taiwan May 2011

Product Warranty (2 years)

Advantech warrants to you, the original purchaser, that each of its products will be free from defects in materials and workmanship for two years from the date of purchase.

This warranty does not apply to any products which have been repaired or altered by persons other than repair personnel authorized by Advantech, or which have been subject to misuse, abuse, accident or improper installation. Advantech assumes no liability under the terms of this warranty as a consequence of such events.

Because of Advantech's high quality-control standards and rigorous testing, most of our customers never need to use our repair service. If an Advantech product is defective, it will be repaired or replaced at no charge during the warranty period. For out-of-warranty repairs, you will be billed according to the cost of replacement materials, service time and freight. Please consult your dealer for more details.

If you think you have a defective product, follow these steps:

1. Collect all the information about the problem encountered. (For example, CPU speed, Advantech products used, other hardware and software used, etc.) Note anything abnormal and list any onscreen messages you get when the problem occurs.
2. Call your dealer and describe the problem. Please have your manual, product, and any helpful information readily available.
3. If your product is diagnosed as defective, obtain an RMA (return merchandize authorization) number from your dealer. This allows us to process your return more quickly.
4. Carefully pack the defective product, a fully-completed Repair and Replacement Order Card and a photocopy proof of purchase date (such as your sales receipt) in a shippable container. A product returned without proof of the purchase date is not eligible for warranty service.
5. Write the RMA number visibly on the outside of the package and ship it prepaid to your dealer.

FCC Class B

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses and can radiate radio frequency energy. If not installed and used in accordance with this user's manual, it may cause harmful interference to radio communications. Note that even when this equipment is installed and used in accordance with this user's manual, there is still no guarantee that interference will not occur. If this equipment is believed to be causing harmful interference to radio or television reception, this can be determined by turning the equipment on and off. If the interference is occurring, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Connect the equipment to a power outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Additional Information and Assistance

1. Visit the Advantech web site at www.advantech.com where you can find the latest information about the product.
2. Contact your distributor, sales representative, or Advantech's customer service center for technical support if you need additional assistance. Please have the following information ready before you call:
   - Product name and serial number
   - Description of your peripheral attachments
   - Description of your software (operating system, version, application software, etc.)
   - A complete description of the problem
   - The exact wording of any error messages

Safety Instructions

1. Read these safety instructions carefully.
2. Keep this User's Manual for later reference.
3. Disconnect this equipment from any AC outlet before cleaning. Use a damp cloth. Do not use liquid or spray detergents for cleaning.
4. For plug-in equipment, the power outlet socket must be located near the equipment and must be easily accessible.
5. Keep this equipment away from humidity.
6. Put this equipment on a reliable surface during installation. Dropping it or letting it fall may cause damage.
7. The openings on the enclosure are for air convection. Protect the equipment from overheating. DO NOT COVER THE OPENINGS.
8. Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
9. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
10. All cautions and warnings on the equipment should be noted.
11. If the equipment is not used for a long time, disconnect it from the power source to avoid damage by transient overvoltage.
12. Never pour any liquid into an opening. This may cause fire or electrical shock.
13. Never open the equipment. For safety reasons, the equipment should be opened only by qualified service personnel.
14. If one of the following situations arises, get the equipment checked by service personnel:

    a. The power cord or plug is damaged.

    b. Liquid has penetrated into the equipment.

    c. The equipment has been exposed to moisture.

    d. The equipment does not work well, or you cannot get it to work according to the user's manual.

    e. The equipment has been dropped and damaged.

    f. The equipment has obvious signs of breakage.

15. DO NOT LEAVE THIS EQUIPMENT IN AN UNCONTROLLED ENVIRONMENT WHERE THE STORAGE TEMPERATURE IS BELOW -20° C (-4° F) OR ABOVE 60° C (140° F). THIS MAY DAMAGE THE EQUIPMENT.

The sound pressure level at the operator's position according to IEC 704-1:1982 is no more than 70dB(A).

DISCLAIMER: This set of instructions is given according to IEC 704-1. Advantech disclaims all responsibility for the accuracy of any statements contained herein.

Contents

Chapter 1 Introduction 2
1.1 Introduction 2
1.2 Specifications 3
1.3 LCD Specifications 4
1.4 Connectors 4
1.5 Dimensions 5
Figure 1.1:FPM-3171G Cutout Dimensions 5
Chapter 2 System Setup 8
2.1 Mounting the Monitor 8
2.1.1 Wall Mounting 8
Figure 2.1:Wall Mounting 8
2.1.2 Panel Mounting 9
Figure 2.2:Panel Mounting 9
2.1.3 Rack Mounting 10
Figure 2.3:Rack Mounting 10
2.2 Desktop, Swing-ARM Mounting 11
2.2.1 Desktop Stand 11
Figure 2.4:Desktop Stand for the FPM-3171G 11
2.2.2 Swing-ARM 12
Figure 2.5:Swing-ARM for the FPM-3171G 12
Appendix A Touchscreen Installation 14
A.1 Introduction 14
A.1.1 Resistive Type 14
A.2 Resistive Touchscreen Driver Installation 17
A.2.1 Hardware 17
A.2.2 Software 18
Appendix B Supported Input Timing Modes 28
B.1 Supported Input Timing Modes 28
Appendix C OSD Operation Keypad 30
C.1 OSD Operation Keypad 30
C.2 OSD Function 31

CHAPTER 1

Introduction

Chapter 1 Introduction

1.1 Introduction

Advantech's FPM-3171G Series is a 17" color TFT LCD flat panel monitor built specifically for industrial applications. With the optional touchscreen, the FPM-3171G Series is an excellent and user-friendly system control interface.

In addition to its usual application as an LCD panel monitor, FPM-3171G comes standard with direct VGA and DVI control signal inputs, making it compatible with Industrial PCs and Workstations. Its OSD (Onscreen Display) function allows you to adjust the display factors and turn the backlight on and off for the front view, functions which become critical as more and more industrial HMI users become aware of the benefits of flat panel monitors. The whole chassis is of stainless steel, and the front panel is of aluminum with NEMA4/IP65 compliance. An optional stainless steel front panel is also available.

The FPM-3171G Series has an optional resistive touchscreen. With a resistive touchscreen, the monitor can be immediately transformed into a remote control system.

1.2 Specifications

General

- Construction: Heavy-duty aluminum and steel chassis
- **Front panel:** Aluminum, NEMA4 / IP65 Compliant
- **Control:** OSD (On Screen Display) control pad on front side
- **Mounting:** Panel, wall, desktop, VESA or rack (with rackmount kit)
- **Dimensions (W x H x D):** 482 x 354 x 68 mm (18.9" x 13.9" x 2.7")
- **Weight:** 9.25kg (20.39 lbs)

Touchscreen (Optional)

- **Type:** 5 wire, analog resistive
- **Resolution:** 4096 x 4096 for resistive model.
- **Light transmission:** 80% ±5
- **Operating Pressure:** 30~45 gram for stylus, contact bounce < 10 ms
- **Controller:** RS-232 and USB
- **Power Consumption:** +5 V @ 100 mA
- **OS Support:** DOS, Windows 2000/XP/CE/Vista, Linux
- **Life Span:** Resistive: 35 million activations (typical) at single point with a 5/8" diameter silicone finger at 350g load at 2 touches per sec.

  Capacitive: 225 million activations (typical) at a single point with a 5/8" diameter silicone finger at 350g load at 2 touches per sec.

1.3 LCD Specifications

- **Display type:** SXGA TFT LCD
- **Display size:** 17"
- **Max colors:** Full color (16.2 million)
- **Max resolution:** 1280 x 1024
- **Dot pitch:** 0.264 x 0.264 mm
- **Viewing Angle:** 140° (H), 130° (V)
- **Luminance:** 300 cd/m^2
- **Storage Temperature:** -20 ~ 60° C (-4 ~ 140° F)
- **Operating Temperature**: 0 ~ 50° C (32 ° ~ 122° F)
- **Backlight Lifetime:** 40,000 hrs
- **Contrast Ratio:** 700:1

1.4 Power Consumption

- **Max. Output Power:** 57W
- **AC Input Voltage:** 100~240VAC
- **Output Voltage:** +12V 4.7A
- **Safety Standards:** BSMI,CE,FCC,CCC

1.5 Connectors

The following connectors are situated on the left hand side of the FPM-3171 Series:

VGA Port (DB-15)

This DB-15 connector can be connected to the system via the external 15-pin DB-15 connector thru the I/O from this unit.

DVI Port (DVI-D)

Connected with a standard DVI connector thru I/O port of this unit. Only supports digital signals

Touchscreen Connector (DB-9) (Optional)

This connector will be present only if a touchscreen is installed. It must be connected to the RS-232 port of the PC. The touchscreen cable is included with all orders which include the RS-232 touchscreen option.

Touchscreen Connector (USB) (Optional)

This connector will be present only if a touchscreen is installed. It must be connected to the USB port of the PC. The touchscreen cable is included with all orders which include the USB touchscreen option.

Note: RS-232 & USB touchscreen interface does not allow connection into the system at the same time, but it can be changed via switch

DC 12V Power in

This connector will be connected to a DC 12V Switching Power Supply.

1.6 Dimensions

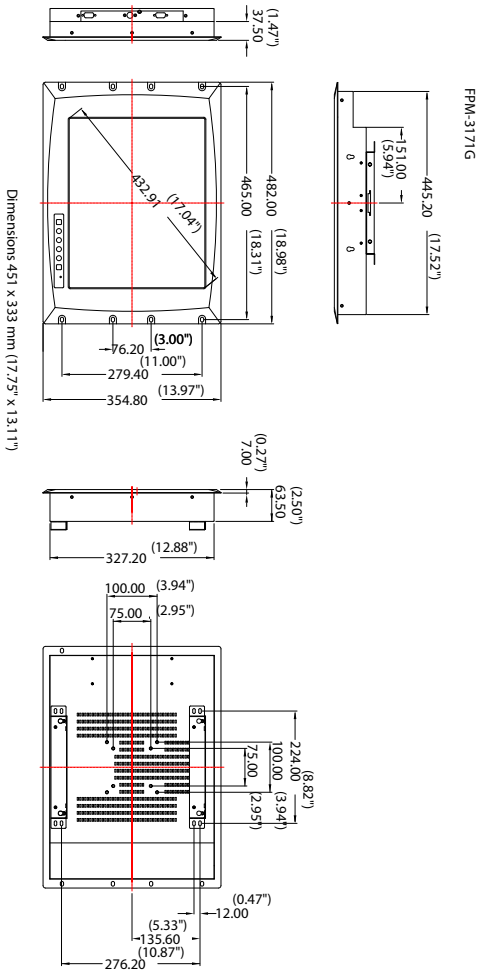

Figure 1.1: FPM-3171G Cutout Dimensions 451 x 333 mm (17.75" x 13.11")

CHAPTER 2

Mounting

Chapter 2 Mounting

2.1 Mounting the Monitor

The FPM-3171G Series can be placed as you require. The versatility of the FPM-3171G mounts enable it to be mounted on your desk or anywhere else.

2.1.1 Wall Mounting

With wall brackets, the FPM-3171G can be mounted directly to a wall.

If you need to install the FPM-3171G in different ways, release the mounting brackets by detaching the four screws on the rear side.

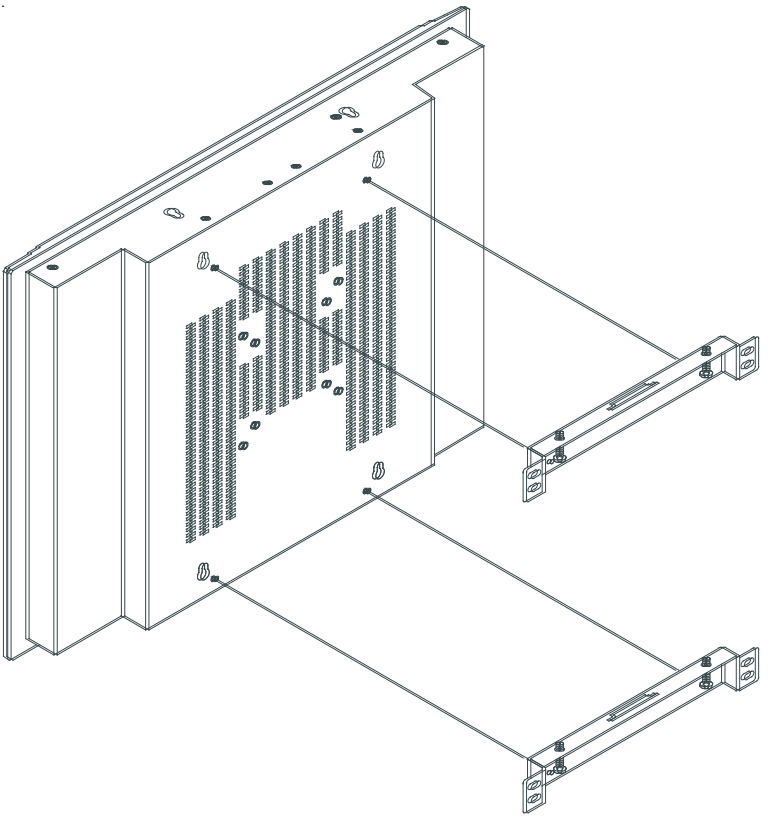

Figure 2.1: Wall Mounting

2.1.2 Panel Mounting

If you need to install the FPM-3171G series on a panel mount, please release the mounting brackets by detaching four screws on rear side and fix them on up and bottom side by screws.

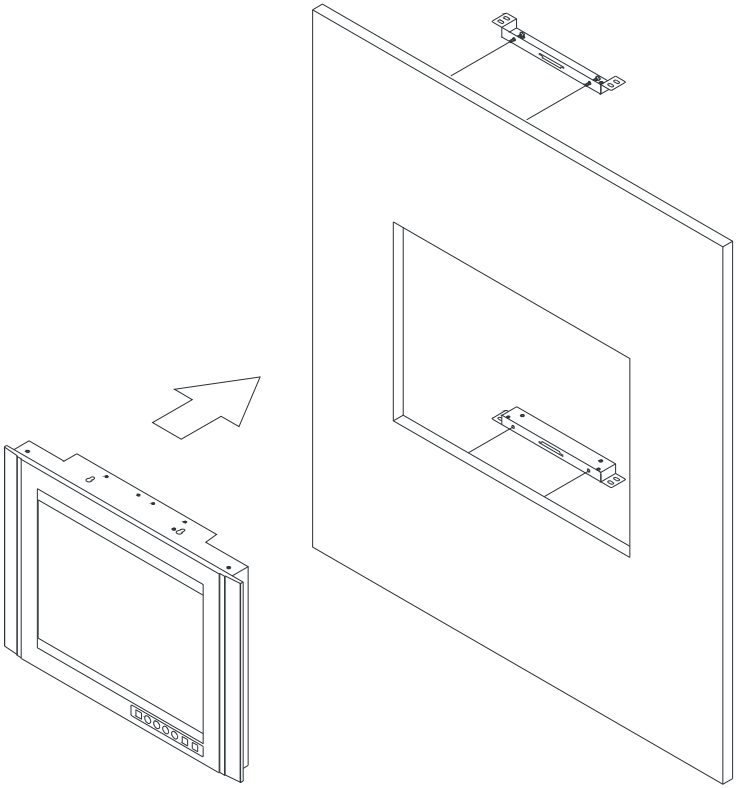

Figure 2.2: Panel Mounting
(Cutout Dimensions: 451 x 333 mm)

2.1.3 Rack Mounting

FPM-3171G series products could be directly mount to the industrial standard 17" rack. There are four screw holes on each side of the panel.

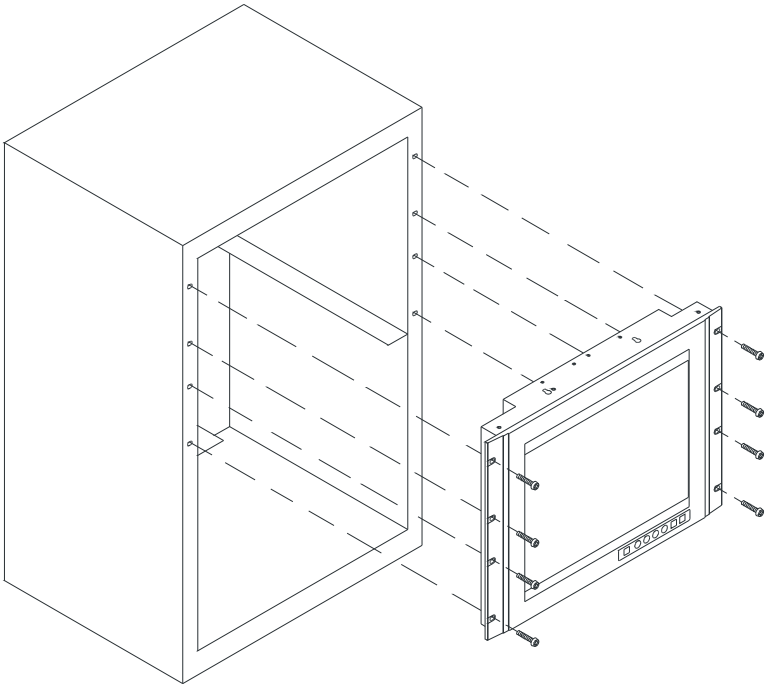

Figure 2.3: Rack Mounting

2.2 Desktop, Swing-ARM Mounting

The FPM-3171G Series can be mounted in other ways. You can place the desktop stand for desktop use or attach it on a swing-arm bracket.

2.2.1 Desktop Stand

The desktop stand brackets are attached to the rear of FPM-3171G. First loosen the screw in point C. Then unscrew the screw in point A. Pull down the bracket and use the screw from point A to fasten the bracket in point B. There should be no screws in point A and point D. Only point B and C.

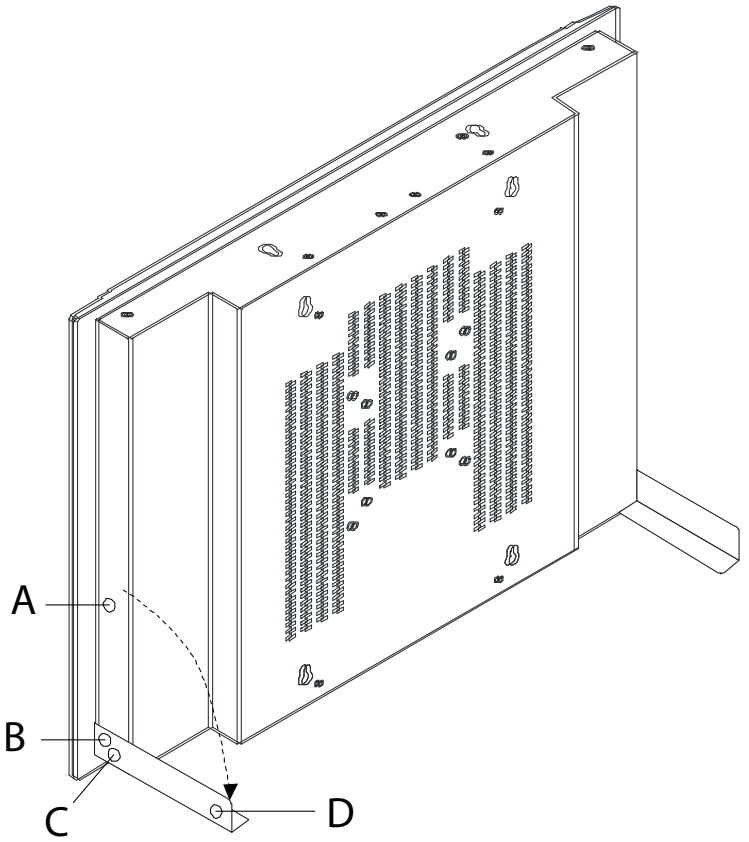

Figure 2.4: Desktop Stand for the FPM-3171G

2.2.2 Swing-ARM

Detach the mounting brackets on the rear side, then attach the FPM-3171G series onto the Swing-ARM mount (75mm or 100mm square bracket).

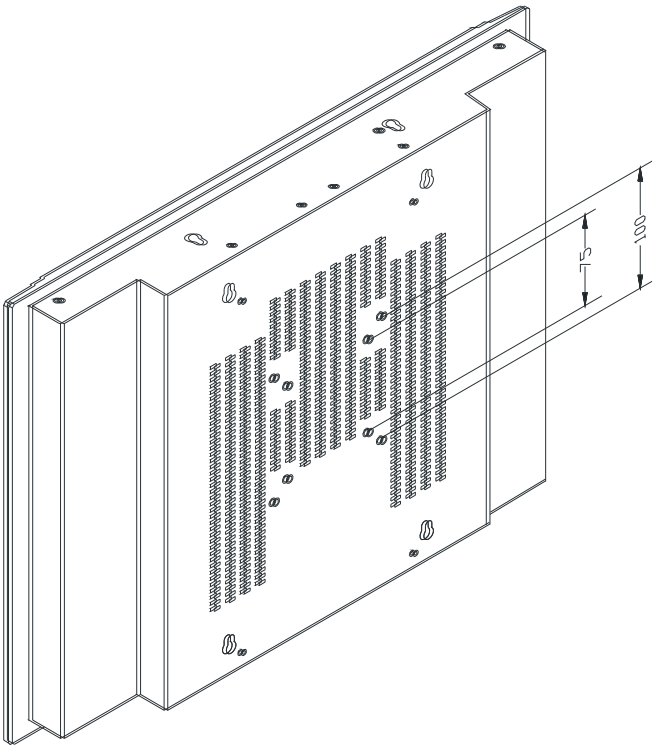

Figure 2.5: Swing-ARM for the FPM-3171G

Appendix A

Touchscreen Driver Installation

Appendix A Touchscreen Installation

A.1 Introduction

The FPM-3171G Series' optional touchscreens uses 5-wire resistive technology. They provide more accurate sensing capacity than other technologies. The touchscreen is specially designed for tough industrial environments, and has been approved to FCC Class B.

Note: RS-232 & USB touchscreen interface does not allow connection to the system at the same time. It can be changed by switch.

A.1.1 Resistive Type

Supply Voltage and Current

- +5 Vdc, nominal (+4.50 Vdc to +5.25 Vdc) Self powered only.
- 50 mA standby, typical at +5 Vdc; during touch 160 mA average, 240 mA peak
- Average power dissipation is 0.5 W, typical.
- Supply must be capable of sourcing 400 mA, minimum.
- Total noise and ripple requirement must be less than 100 mV (p-p) for frequencies below 1 MHz, and less than 50 mV (p-p) for frequencies above 1 MHz.

Serial Interface

- EIA 232E (Serial RS-232), DCE configuration. 8 Data Bits, 1 Stop Bit, No Parity, Full Duplex.
- Hardware handshaking: RTS/CTS.
- DSR is pulled HIGH (>+3V) by the touch screen control board when connected and powered. DTR can be asserted by the host to interrupt the flow of data from the controller. Note that if the application does not monitor CTS, then an interval of approximately 5 seconds should be inserted between the issuance of a reset command and any other command.

Communication Parameters

- Baud Rate 9600 (default), and 17200 bps
- 8 Data bits, 1 stop bit, no parity only.

Interface - USB

Conforms to USB Revision 1.1. If the USB is connected to the controller, the controller will communicate over the USB, and will not communicate over the serial port. The touch screen control board is never powered from the USB – it is self-powered only.

Operating Modes

Full AccuTouch SmartSet protocol. Emulation of E281A-4002 protocol can be selected by SmartSet command.

Initial/ Stream/ Untouch/ Z-axis Enable Modes.

Touch Resolution: 4096x4096, size independent.

Conversion Time: Approximately 10 ms per coordinate set.

A.2 Resistive Touchscreen Driver Installation

A.2.1 Hardware

Touchscreen controllers must be configured for the driver prior to installation. Elo typically ships controllers in a default setup that is compatible with this driver. Controller requirements are:

Serial

Serial controllers must conform to these minimum requirements:

- Baud rate-9600 baud.
- Data format-SMARTSET
- It is desirable for a full handshaking connection to be established between the touchscreen controller and the computer, but it is not required. The controller will function with this driver in a "two-wire", Receive Data and Ground (RxD and Gnd) configuration. The consequences of a two-wire connection are:

+ Automatic detection of the controllers on serial ports during setup is not possible

+ Controller information will not be registered in the Property Page of the Control Panel

USB

* USB controllers require no configuration prior to installation.

* Elo's USB controllers are Human Interface Device (HID) compliant. The Windows 2000 and Windows XP operating systems have native HID drivers that provide low-level support for Elo touchscreen controllers. An Elo touchmonitor with a USB touchscreen controller installed will provide the following limited operation with these native HID drivers. Operation of the controller will be limited without the installation of the software discussed in the next section:

- The mouse cursor will move on the display in response to touch
- The direction of motion on the display will depend on the orientation of the touchscreen and the defaults programmed into the controller and the driver
- No “beep” will be heard when the screen is touched
- No Control Panel application is available to configure the operation of the driver.

A.2.2 Software

There are many options to consider when installing the driver files. This section will explain the most common ways that the driver is installed. Consult Elo Applications Engineering for situations not covered in this section.

Setup from Windows Desktop

For WinXP OS please execute:
CDROM: \\TouchScreen-DRV\ELOTOUCH\WinXP\SetupElo.exe

For Win2000 OS please execute:
CDROM: \\TouchScreen-DRV\ELOTOUCH\Win2K\SetupElo.exe

Single monitor, serial controller

1. Run the self-extracting zip file to unzip the files, using the Run EloSetup option

2. EloSetup will launch. Check the "Install Serial Touchscreen Drivers" box.

Elo Touchscreen Setup
Welcome to Elo Touchscreen Setup.
This program will install the Elo USB and Serial touchscreen drivers on your computer. It is strongly recomended that you exit all Windows programs before running this Setup program.
Install Serial Touchscreen Drivers
Install USB Touchscreen Drivers
< Back
Next >
Cancel

3. Review and accept the License Agreement

4. Check “Auto-detect Elo devices” if your touchmonitor serial cable is connected to the computer and the serial cable supports hardware handshaking. If you connect the serial cable later, do not check the “auto-detect” box. Go to the next screen.

Elo Touchscreen Setup
Select the COM ports to use with Elo serial touchscreens. Check the Auto-detection box if you want Setup to auto-detect COM ports currently connected to Elo devices.
During Auto-detection, Setup will send data to each port which may temporarily interfere with some types of serial devices.
Click Next to continue.
Auto-detect Elo devices.
< Back
Next >
Cancel

5. A list of all the serial ports that the system detected is shown. If you checked the auto-detect box in the previous screen, and your touch-monitor serial cable is attached to the computer, the COM port that you selected should be checked in the list. If you agree with the selection, click Next and proceed to the next screen.

6. The COM port you selected will be shown in the window of this screen. This is your last opportunity to change your COM port selection before the driver files are installed. Use the Back button(s) to change any of the selections you previously made. Click "Next" to complete the installation of the driver files.

7. Depending on the revision of the driver you are installing, Windows may advise you that the “software you are installing has not passed Windows logo testing…” . Select “Continue Anyway” to proceed with the installation. This message can be suppressed in future installations by changing the selection in “Driver Signing Options” at Control Panel>System>Hardware>Device Manager>Driver Signing.

8. When the “Setup Complete” screen appears, you may choose to run calibration the (Elo Video Alignment program, EloVA) immediately or wait until later. If you choose not to run this program now, you can run it from the Elo Control Panel application.

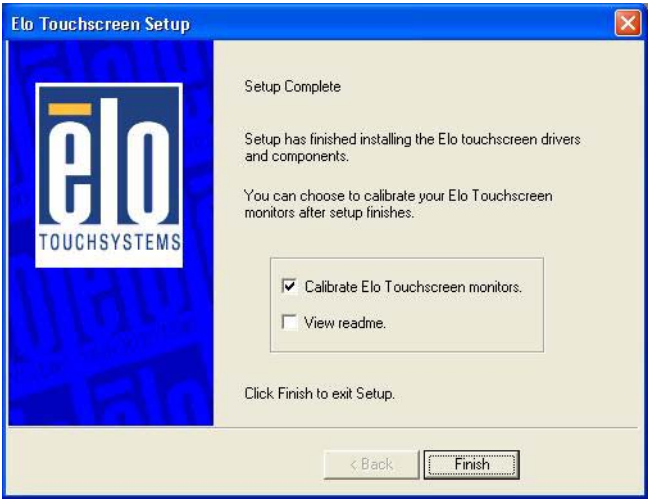
Elo Touchscreen Setup
TOUCHSYSTEMS
Setup Complete
Setup has finished installing the Elo touchscreen drivers and components.
You can choose to calibrate your Elo Touchscreen monitors after setup finishes.
Calibrate Elo Touchscreen monitors.
View readme.
Click Finish to exit Setup.
< Back
Finish

Single monitor, USB controller

1. Run the self-extracting zip file to unzip the files, using the Run EloSetup option.
2. EloSetup will launch. Check the “Install USB Touchscreen Drivers” box.
3. Review and accept the License Agreement.
4. The driver files will install. When the “Setup Complete” screen appears, you may choose to run calibration (the Elo Video Alignment program, EloVA) immediately or wait until later. If you choose not to run this program now, you can run it from the Elo Control Panel application.

Multiple monitors, serial controllers

1. Follow the general procedure for Single monitor, serial controller installation above, auto detecting or selecting all the serial ports that you will use.
2. The driver files will install. When the “Setup Complete” screen appears, you may choose to run calibration (the Elo Video Alignment program, EloVA) immediately or wait until later. If you choose not to run this program now, you can run it from the Elo Control Panel application. When EloVA runs for the first time, it will attempt to calibrate all controllers and/or serial ports that were installed. Press the Esc key on the keyboard to terminate or skip calibration for any monitor, or allow the program to time out (as indicated by the progress bar reaching maximum).

Multiple monitors, USB controllers

1. Follow the procedure for Single monitor, USB controller installation above.
2. The driver files will install. When the “Setup Complete” screen appears, you may choose to run calibration (the Elo Video Alignment program, EloVA) immediately or wait until later. If you choose not to run this program now, you can run it from the Elo Control Panel application. When EloVA runs for the first time, it will attempt to calibrate all controllers and/or serial ports that were installed. Press the Esc key on the keyboard to terminate or skip calibration for any monitor, or allow the program to time out (as indicated by the progress bar reaching maximum). The program will continue until all controllers and/or ports have been calibrated.

Multiple monitors, serial and USB controllers

1. Run the self-extracting zip file to unzip the files, using the Run EloSetup option
2. EloSetup will launch. Check both the “Install Serial Touchscreen Drivers” and “Install USB Touchscreen Drivers” boxes.
3. Review and accept the License Agreement
4. The program will appear to proceed as a single/multiple serial controller installation but USB files will also install.
5. The driver files will install. When the “Setup Complete” screen appears, you may choose to run calibration (the Elo Video Alignment program, EloVA) immediately or wait until later. If you choose not to run this program now, you can run it from the Elo Control Panel application. When EloVA runs for the first time, it will attempt to calibrate all controllers and/or serial ports that were installed. Press the Esc key on the keyboard to terminate or skip calibration for any monitor, or allow the program to time out (as indicated by the progress bar reaching maximum). The program will continue until all controllers and/or ports have been calibrated.

Silent Install

The EloSetup program for this driver may also be run as an attended or unattended program from a command line, batch file, etc. Example usage:

To Silent install for USB controllers use

EloSetup /iu /s

To Silent install for a Serial controller on COM1 use

EloSetup /is /P:1 /s

To view all the options available for this installation method, run EloSetup as **EloSetup /h.**

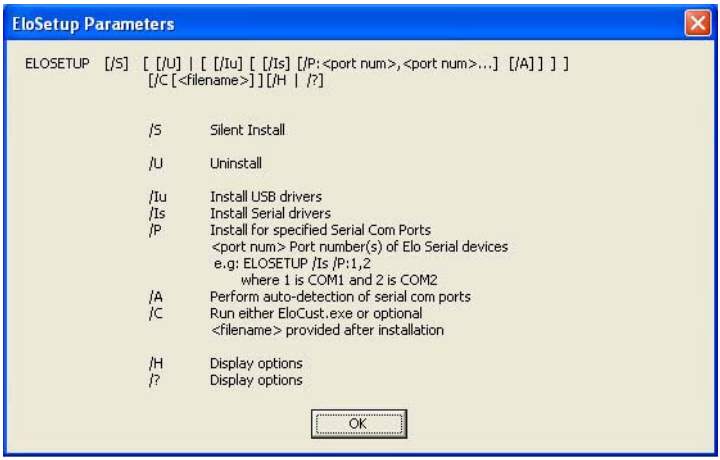

- Adding Additional Serial Controllers

Click on the Change option from the Add/Remove programs in the Control Panel, Elo entry.

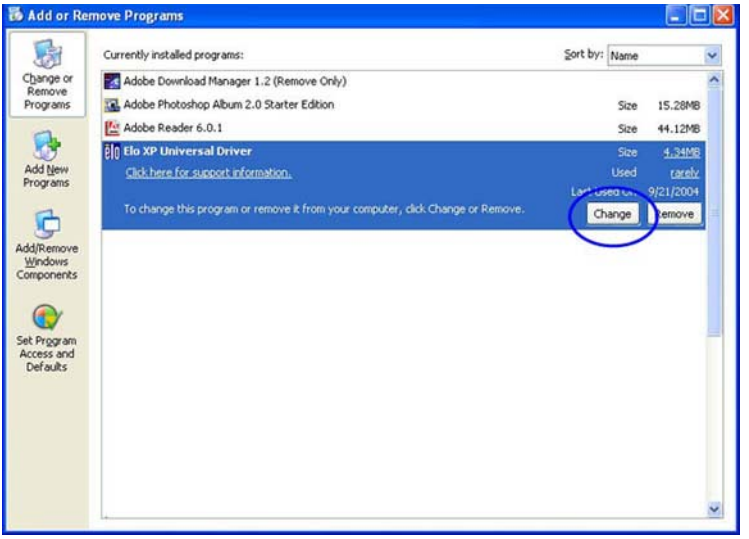
Add or Remove Programs
Change or Remove Programs
Add New Programs
Add/Remove Windows Components
Set Program Access and Defaults
Currently installed programs:
Sort by: Name
Adobe Download Manager 1.2 (Remove Only)
Adobe Photoshop Album 2.0 Starter Edition
Size 15.28MB
Adobe Reader 6.0.1
Size 44.12MB
Elo XP Universal Driver
Size 4.34MB
Click here for support information.
Used rarely
9/21/2004
To change this program or remove it from your computer, click Change or Remove.
Change
Remove

Elo Touchscreen Configuration
TOUCHSYSTEMS
Welcome to Elo Touchscreen configuration.
This application allows you to select serial ports for Elo Serial touchscreens and install Elo USB touchscreen drivers on your computer. It is strongly recommended that you exit all Windows programs before running this configuration program.
Configure Serial Touchscreens
Install USB Touchscreen Drivers
< Back
Next >
Cancel

• Change Serial Port

To change Serial port click on the Change option from the Add/Remove programs in the Control Panel, Elo entry.

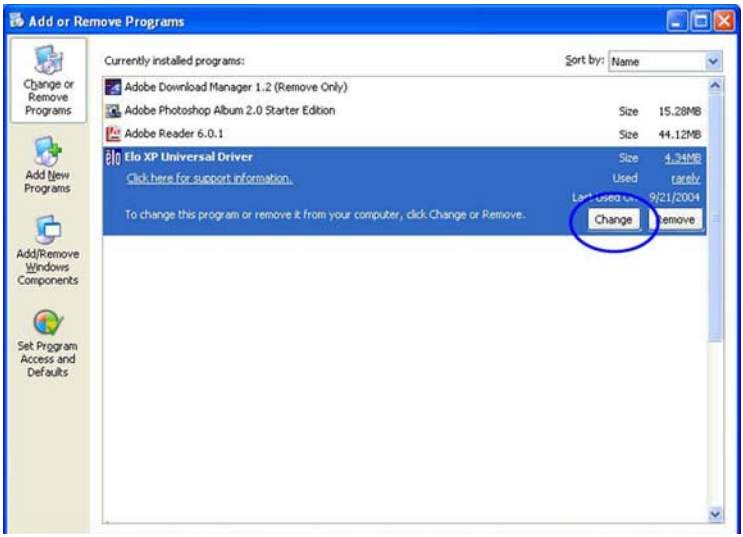

- Adding Additional USB Controllers

If there are Elo USB devices already installed, plug the USB cable from the touchmonitor into the computer and run EloVA to calibrate the touchmonitors.

If there are no Elo USB devices attached to the system, click on the Change option from the Add/Remove programs in the Control Panel, Elo entry.

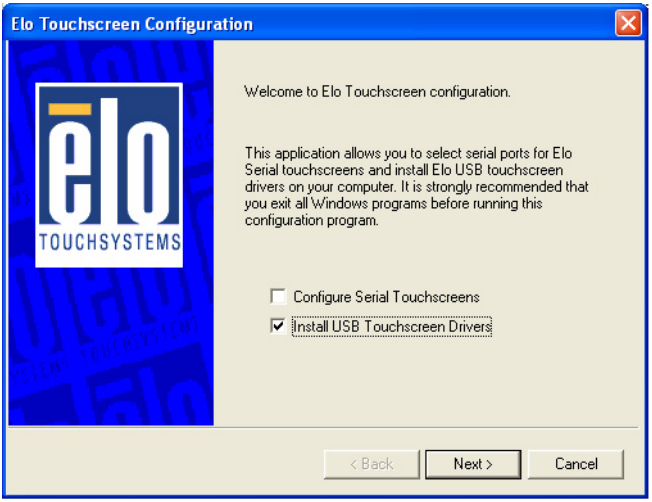
Elo Touchscreen Configuration
TOUCHSYSTEMS
Welcome to Elo Touchscreen configuration.
This application allows you to select serial ports for Elo Serial touchscreens and install Elo USB touchscreen drivers on your computer. It is strongly recommended that you exit all Windows programs before running this configuration program.
Configure Serial Touchscreens
Install USB Touchscreen Drivers
< Back
Next >
Cancel

Appendix B

Setting Serial Data for Expansion

Appendix B Setting Serial Data for Expansion

B.1 Supported Input Timing Modes

The different frequencies below are already programmed in this module, and the synchronous signal inputs are automatically recognized.

Table B.1: Supported Input Formats

	Vertical Frequencies				
Resolution	56 Hz	60 Hz	70 Hz	72 Hz	75 Hz
640 x 480		Yes		Yes	Yes
720 x 400			Yes		
800 x 600	Yes	Yes		Yes	Yes
1024 x 768		Yes	Yes		Yes
1280*1024		Yes		Yes	Yes

Note 1: Even if the preset timing is entered, some adjustment of functions such as Horizontal period, CLK-delay and display position, are required. The adjusted values are memorized in every preset number.

Note 2: This module recognizes the synchronous signals with near preset timing of the frequency of the HS and Vsync, even in the case that the signals other than the preset timing that were entered.

Note 3: Because adjustments may not fit, such as differing magnifying ratios or, in the case that you use it except for the display timing that was preset.

Appendix C

OSD Operation Keypad

Appendix C OSD Operation Keypad

C.1 OSD Board Overview

C.1.1 OSD Button Description

Buttons	Descriptions
Power	Turn the monitor power ON or OFF.
Auto/Exit	Automatically adjust the clock, phase, H-position and V-position. Exit menu.
Down/Right/ Increase	Activate the volume control. Move the selector to the next option. Increase the gauge value of the selected option.
Up/Left/ Decrease	Active volume control. Move the selector to the previous option. Decrease the gauge value of the selected option.
Menu/Sel	Activate the OSD menu. Enter/confirm the selected option.
Source	Changes Input video source (DVI or VGA)

C.1.2 LED Function

On	Green
StandBy/Off	Green Blinking
No Signals	Orange

C.2 OSD Key Functions

Each selected value is stored into LCD memory after SEL signal input or time out. The stored values are not affected if the power is turned off. But the selected value is not available in case a selected mode is changed before time out or power is turned off before time out. TIME OUT 5-6 seconds (Can be set in OSD Manager) The default definition of input keys is shown as following:

C.2.1 Menu Start

Generate Main Menu

Press MENU Button in OSD function key

- Main Menu

- Available Key Functions

On Off	N/A	◄	N/A
Auto Exit	Select to exit menu or wait for time out	Menu Sel	N/A
►	N/A	Source	N/A

C.2.2 Brightness

Select by Left and Right Button, press Menu Button for selection Confirmation

- Main Menu

- Sub-Menu

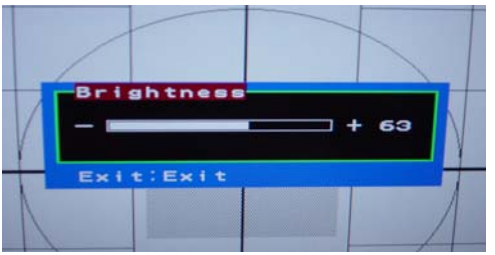

- Available Key Functions

On Off	Power Off the LCD Monitor	◄	Increase the gauge value of the selected option.
Auto Exit	Return to last menu	Menu Sel	Selected to confirm
►	Decrease the gauge value of the selected option.	Source	N/A

C.2.3 DIM Brightness

- Main Menu

- Sub-Menu

- Available Key Functions

On Off	Power Off the LCD Monitor		Increase the gauge value of the selected option.
Auto Exit	Return to last menu	Menu Sel	Selected to confirm
	Decrease the gauge value of the selected option.	Source	N/A

C.2.4 Contrast

- Main Menu

- Sub-Menu

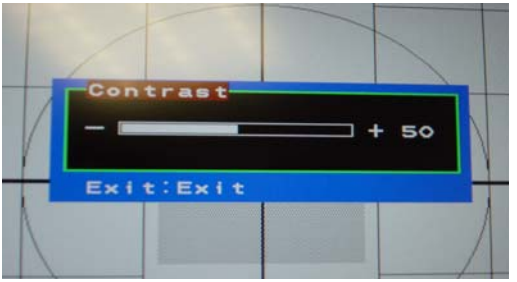

- Available Key Functions

On Off	Power Off the LCD Monitor		Increase the gauge value of the selected option.
Auto Exit	Return to last menu	Menu Sel	Selected to confirm
	Decrease the gauge value of the selected option.	Source	N/A

C.2.5 Geometry

- Main Menu

- Sub-Menu

- Available Key Functions

On Off	Power Off the LCD Monitor	◄	Increase the gauge value of the selected option.
Auto Exit	Return to last menu	Menu Sel	Selected to confirm
►	Decrease the gauge value of the selected option.	Source	N/A

C.2.6 Color

- Main Menu

- Sub-Menu

- Available Key Functions

On Off	Power Off the LCD Monitor		Increase the gauge value of the selected option.
Auto Exit	Return to last menu	Menu Sel	Selected to confirm
	Decrease the gauge value of the selected option.	Source	N/A

C.2.7 OSD Manager

- Main Menu

- Sub-Menu

- Available Key Functions

On Off	Power Off the LCD Monitor	◄	Increase the gauge value of the selected option.
Auto Exit	Return to last menu	Menu Sel	Selected to confirm
►	Decrease the gauge value of the selected option.	Source	N/A

C.2.8 Input Select

- Main Menu

- Sub-Menu

- Available Key Functions

On Off	Power Off the LCD Monitor	◄	Increase the gauge value of the selected option.
Auto Exit	Return to last menu	Menu Sel	Selected to confirm
►	Decrease the gauge value of the selected option.	Source	N/A